





## Selecting the Correct Motor

Selecting the correct Somfy motor to suit the end product type and dimensions



# Roller Blind Selection Chart - 40mm and Wirefree

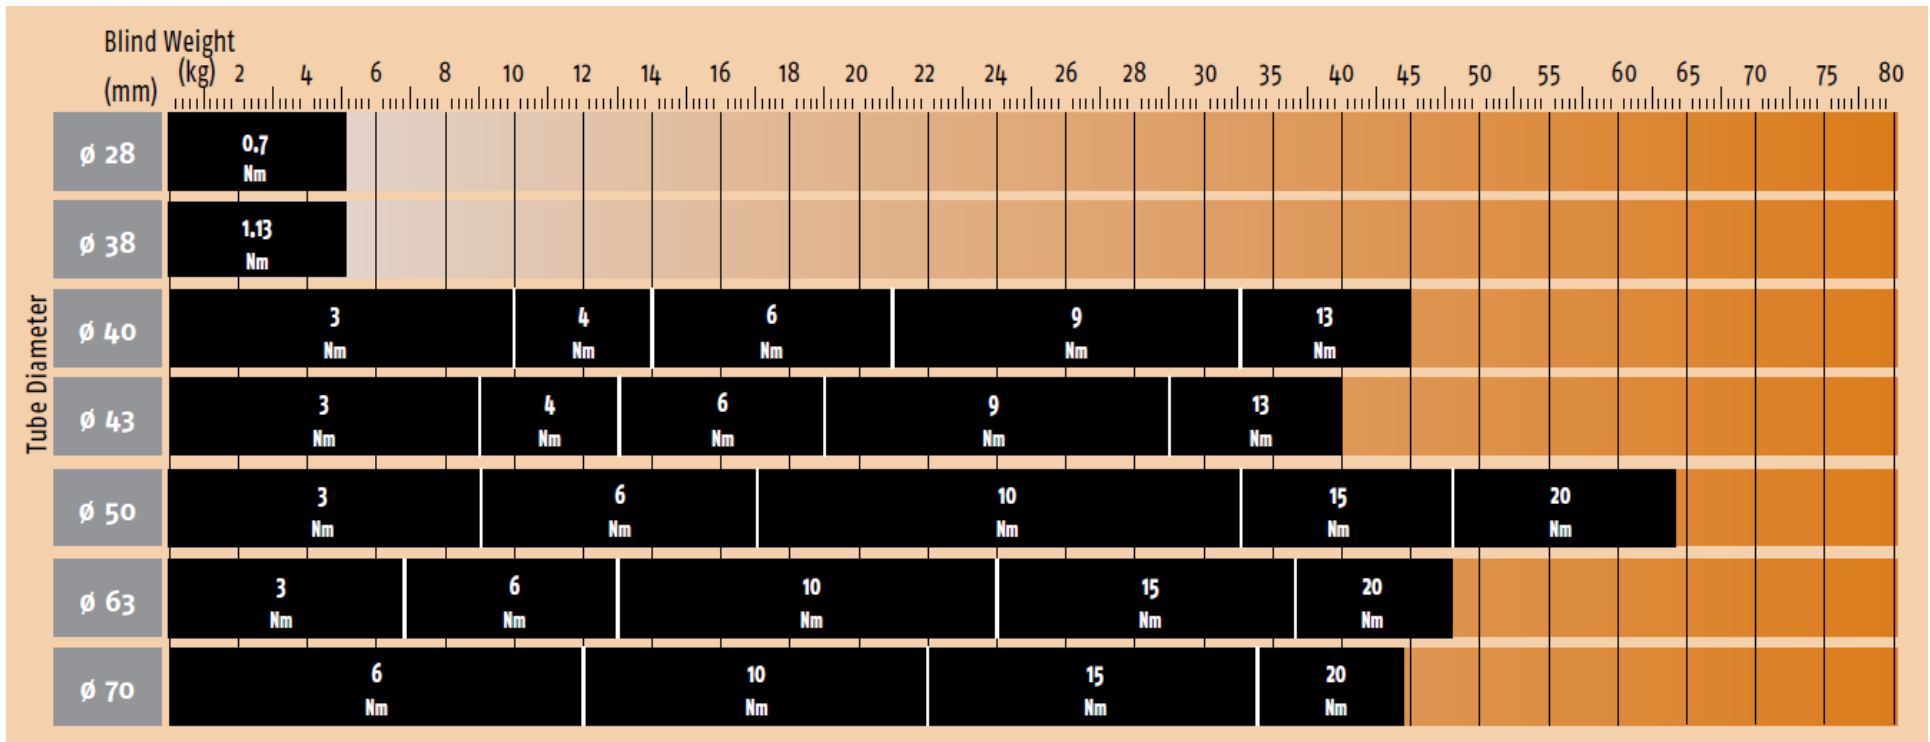


# Awning Selection Chart – Folding Arm

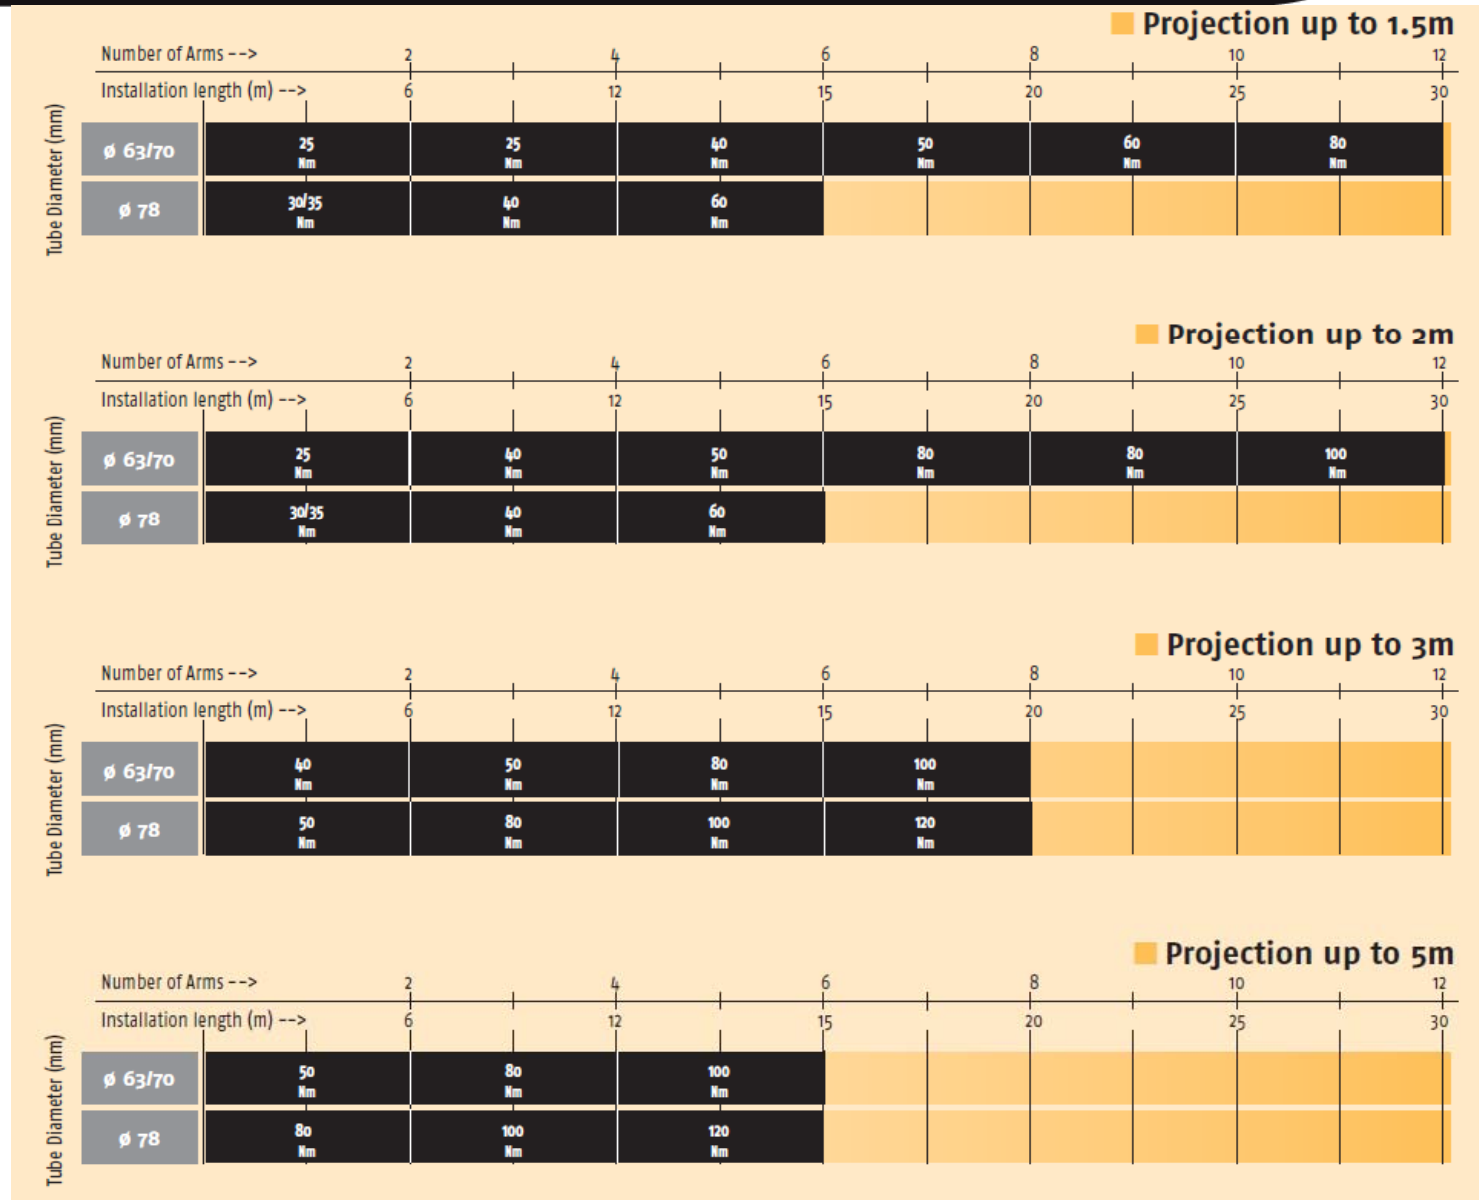

# Awning Selection Chart – Drop Arm

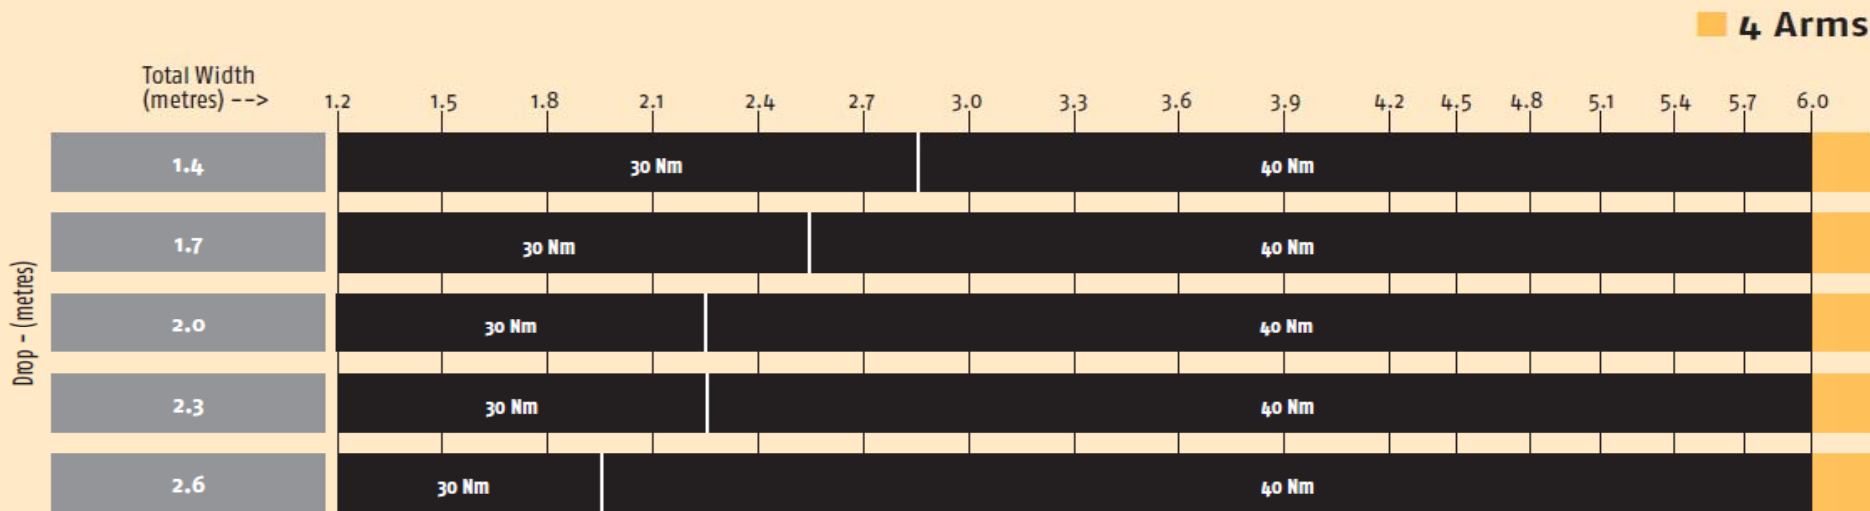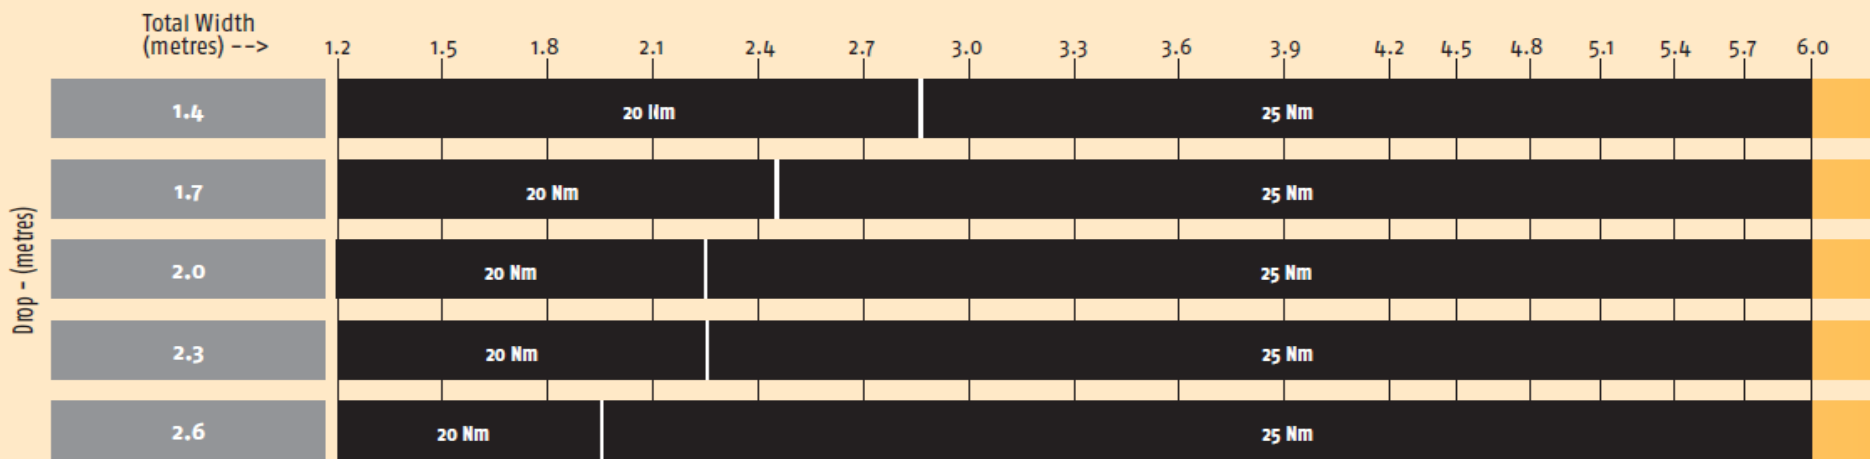

# Awning Selection Chart – Sunscreen

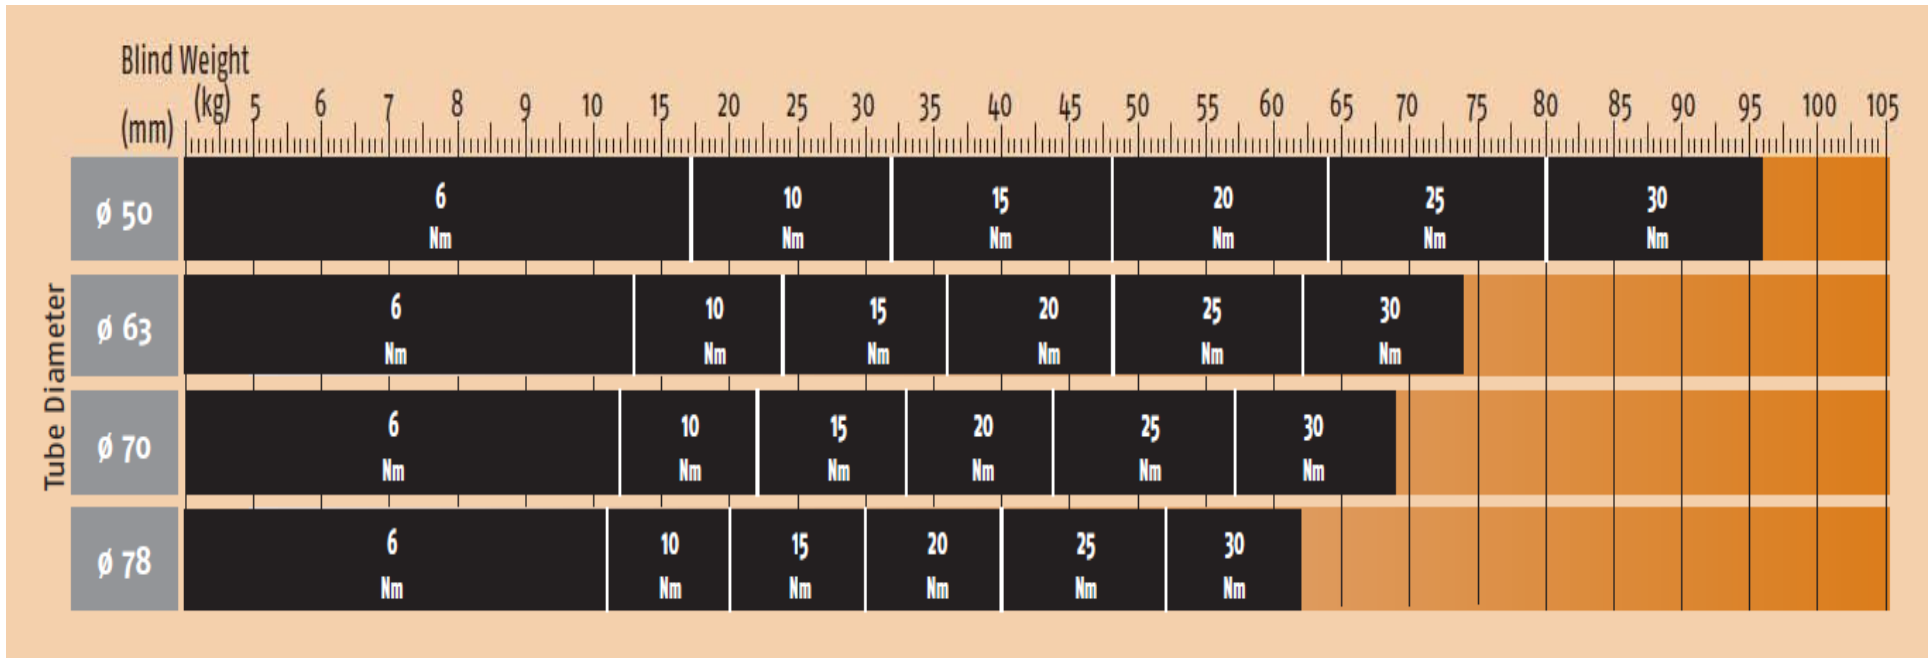

# Roller Shutter Selection Chart

## Height up to 1.5m

Tube Diameter	Shutter Weight (kg)																											
	(mm)	(kg)	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	
ø 40			4 Nm	9 Nm	13 Nm																							
ø 50			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm																		
ø 60			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm																		
ø 70			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm	55 Nm	60 Nm	80 Nm	100 Nm	120 Nm													

## Height up to 2.0m

Tube Diameter	Shutter Weight (kg)																											
	(mm)	(kg)	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	
ø 40			4 Nm	9 Nm	13 Nm																							
ø 50			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm																		
ø 60			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm																		
ø 70			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm	55 Nm	60 Nm	80 Nm	100 Nm	120 Nm													

## Height up to 3.0m

Tube Diameter	Shutter Weight (kg)																											
	(mm)	(kg)	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	
ø 40			4 Nm	9 Nm	13 Nm																							
ø 50			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm																		
ø 60			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm																		
ø 70			6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	30 Nm	40 Nm	50 Nm	55 Nm	60 Nm	80 Nm	100 Nm	120 Nm													

# Curtain Motor Selection Chart









Track type		Glydea™ 35			Glydea™ 60e		
		3 m	6 m	10 m	6 m	10 m	12 m
Straight	A 	35*	35*	35	60	60	55
	B 	35*	35*	35	60	60	55
Bent	C  R = 300 mm	35*	25	20	45	45	35
	D  R = 300 mm	35*	25	20	45	45	35
	E  R = 300 mm	15	10		35	25	
	F  R = 300 mm	15	10		35	25	
Curved	G  R = 3000 mm	35	15		35	25	8 m
	H  R = 3000 mm	30	10		30	20	8 m

Chart values shown in: kg