

# Pro Charging station

## 16 Channel USB-C connector

The power to simultaneously charge up to 16 Smart Shading WireFree motors or External Battery packs at once.



## PRODUCTS MAIN FUNCTIONALITIES



**Simultaneously fast charge** up to 16 motors or External Battery packs with USB-C connectors



**Powerful 15V** fast charging compatibility



**2 Storage choices** — table-top or wall/racket mount



**Designed with heat dissipation fan**



**Compatible with** Smart Shading motors and external battery packs

# Pro Charging station

## 16 Channel USB-C connector

### MAIN BENEFITS & CHARACTERISTICS

- Simultaneously fast charge up to 16 Smart Shading Wirefree motors or External Battery packs with USB C connectors
- Compatible with Movelite 35 Wirefree RTS curtain motor (Standard Charge only)
- Simplified and efficient charging experience for Smart Shading Wirefree Motors and battery packs
- Powerful 15V fast charging capability
- 2 Charging station store options (Table-top or Wall mount)
- Charging station designed with heat dissipation fan

### SAFETY PRE-CAUTIONS

- For internal use only
- Designed for charging Somfy Smart Shading WireFree motors and external battery packs only  
Not to be used to recharge any other electronic devices
- Do not extend the USB C charging cable over 4m. Do not substitute the power supply plug or charging cables
- Keep away (Minimum 1 Meter) from all type of flames, sparks or incandescent material
- Do not use the charger if the cable(s) is damaged
- Do not charge in a hot or humid environments
- Do not leave the Charger permanently plugged into the Somfy motor or battery pack
- The power unit may slightly heat up while charging
- The LED on the power plug will aluminare green to indicate the charging process is complete


# Pro Charging station

## 16 Channel USB-C connector

### DIMENSIONS

*Excludes mounting brackets*

Length (L)	440mm
Width (W)	200mm
Height (H)	55mm

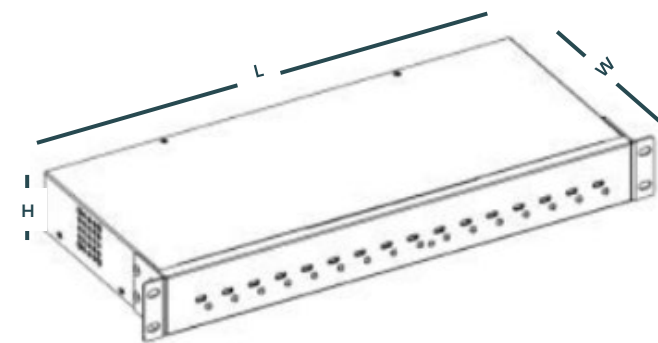



### KIT INCLUSIONS

- 1 x Charging Station
- 16 x 3m USB C Charging cables
- 1 x AU power plug
- 2 Mounting brackets & 8 x Screws (Wall mount)
- 4 x Screw on Rubber Bumper feet (Table-top)
- 1 x User Manual



### INDICATOR INSTRUCTIONS

LED INDICIATORS	LED OPERATION	INDICATION
STAUS LED for each output	 Solid	No Motor or battery pack connected <u>OR</u> motor / battery pack is fully charged.
	 Blinking	Motor or battery pack is plugged in, and the battery is charging



# Pro Charging station

## 16 Channel USB-C connector

### TECHNICAL PERFORMANCE

Item Number	9029512
Output Voltage	15V DC
Input Voltage	230V AC
Max Current Output	1.33 A
Colour	Black
Charging Port	USB-C
Number of outputs	16
Working Temperature	-20°C –45°C
IP Rating	IP30
Insulation Class	Class III

### CHARGING COMPATIBILITY

Item Number	Motors with Internal Battery	Charging time with Pro –Charging station <i>Using 3m charging cable provided</i>
1245938	Sonesse 28 WireFree Zigbee Li-ion 2/20	1.5 Hours (Fast Charge)
1245992	Sonesse 40 WireFree Li-ion Zigbee 4/20	4 Hours (Fast Charge)

Item Number	Motors with External Battery Pack	
9028930	Zigbee External Li-ion Battery pack (Charger connects to the USB-C charging plug of the external battery pack)	1 hour 45 mins (Fast Charge)
1245937	Sonesse 28 WireFree Zigbee 1.1/20	
1241674	Tilt & Lift 25 Zigbee	
1241782	Tilt Only 50 Zigbee	

Item Number	RTS motors with USB C Connector	
1246145	Movelite Wirefree 35 RTS with USB-C Connector	6 Hours (Standard charge)