

Tilt&Lift 25 RTS Central

PRODUCT SPECIFICATIONS



Without any wire, the easy-to-fit motorisation for small and medium venetian, roman and pleated blinds.

PRODUCT MAIN FUNCTIONALITIES



Battery operated motor

Powered by batteries, solar pack or power supply.



"my" favourite

In one click move the blind to your favourite position.

Somfy +

WireFree solution:
For small headrails of 25 mm



Tilt & Lift

Can both tilt and lift venetian blinds.



WireFree


For quicker installation.

RECOMMENDED TO USE WITH:

WireFree range of power options



Compatible with modulis functions

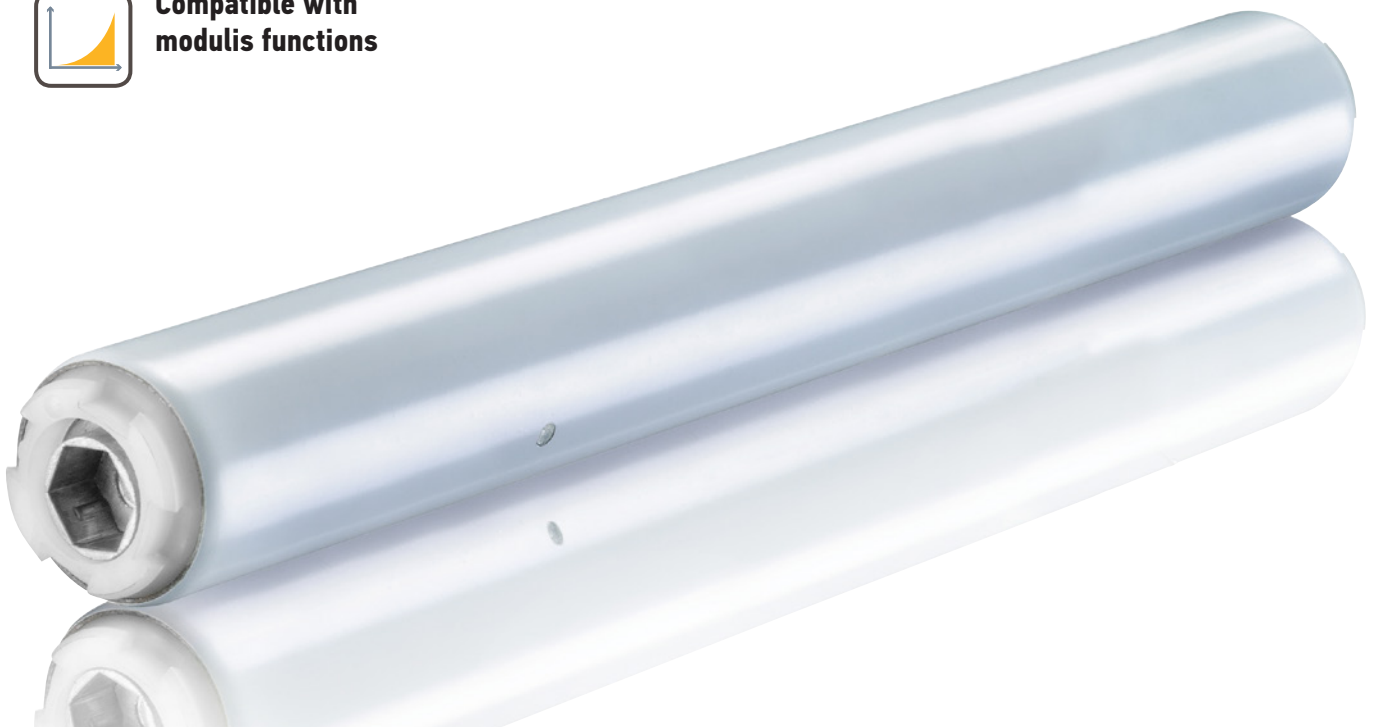

Tilt&Lift 25 RTS Central

PRODUCT SPECIFICATIONS



BENEFITS FOR PROFESSIONALS

Easy integration

- Suitable for headrails of at least 25 x 25 mm with standard CTS25 accessories
- Attached external antenna

Easy installation

- Fast installation
- No wiring
- No need to have electrical knowledge

Quick setting

- Up and down end limits set via transmitter or RTS wall switch

BENEFITS FOR END USERS

Simple, effortless and comfort

- Move your blinds effortlessly and remotely thanks to radio control
- In one click move your blinds to your favourite “my” position.

Access to RTS product range for more benefits

- Compatible with the range of RTS controls, including the Modulis transmitters

Discreet integration

- Quick and clean installation with no damage to walls

Save energy

- Low consumption motor

TECHNICAL DATA

Supply	DC
Index protection rating	IP30
Limit switch unit	Electronic
Limit switch capacity	110 turns
Temperature working range	0°C to +60°C
Electric insulation	Class III

DIMENSIONS

L1 (mm)	207
L2 (mm)	197


COMPATIBLE END PRODUCTS



Roman blinds




Pleated and Cellular blinds



Venetian blinds

PERFORMANCES


Nominal Voltage	12V DC
Torque (Nm)	0.8
Speed (rpm)	30
Radio Frequency	433.42 MHz
Item Number	1002461

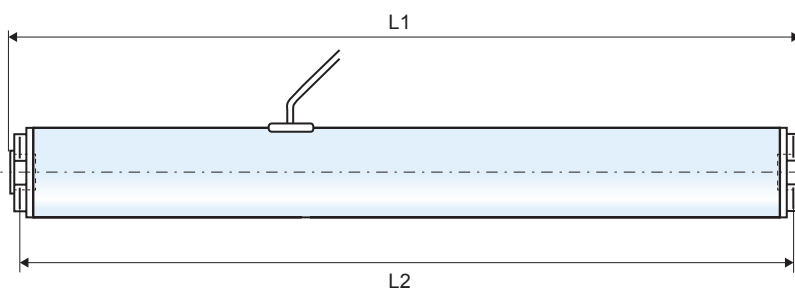

MOTOR CABLE





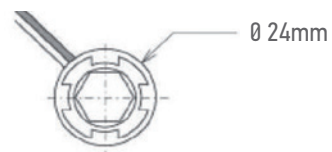






OUTPUT AXIS



Tilt&Lift 25 RTS Central

WIREFREE POWER OPTIONS



A. TUBE FOR BATTERIES	TUBE FOR RECHARGEABLE BATTERIES		D. 12V MAINS SUPPLY
<p>8AA Lithium batteries 1 x #9014834</p> <p>8 X </p>	<p>10AA NiMH batteries 1 x #9018621</p> <p>10 X </p>		<p>12V AC/DC power supply #1822445</p> 
<p>Single Mount 1 x #9018685</p>  <p>OR</p> <p>Dual Mount 2 x #9018685</p> 	<p>B. WITH BATTERY TUBE AND CHARGER</p>	<p>C. WITH SOLAR PANEL</p>	<p>Direct plug to the motor</p>
	<p>Single Mount 1 x #9018608</p>  <p>OR</p> <p>Dual Mount 2 x #9018608</p>  <p>Use with: AC Wall Charger #9018620</p> 	<p>Battery Tube + Solar Panel (Solar Pack #9019034)*</p>  <p>– *Batteries not included – Wall mount clips & solar brackets are included.</p> 